


General Technical Information


Bestorq Single Cogged X5 EPDM Belts 3LX, AX, BX, CX, 3VX, 5VX, 8VX, XPZ, XPA, XPB, XPC

WEDGE

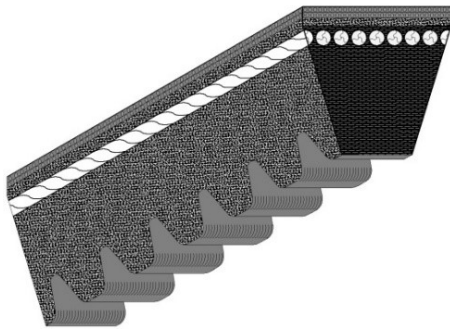

BESTORQ® single, raw edge notched V-belts offer class leading belt performance. The belts are manufactured using highly engineered, high performance components. The components are made using the latest in belt technology available on a global basis. The “X” in the part number refers to higher load ratings than standard wrapped belts.

CLASSICAL

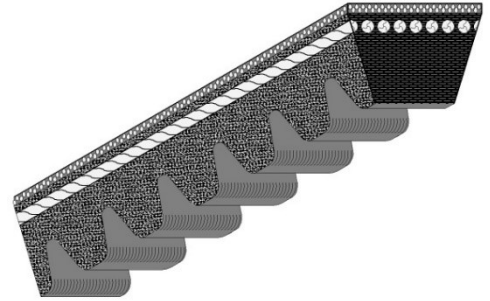

All belts of a size are manufactured to run as a matched set, i.e. any **BESTORQ 5VX900** belt will run as a matched set with any other **BESTORQ 5VX900** belt.

The lower compression section of the belt is made of highly fiber reinforced, oil and heat resistant, engineered synthetic rubber compound. It is specifically compounded for excellent wear resistance, cool running, flexibility. It has been proven through thousands of hours of testing. The rubber directly surrounding the tensile member cables is also fiber reinforced and compounded for great adhesion to the tensile member cords. The top fabric is a specially woven, synthetic-natural fiber blend. The notches are engineered to allow the belts to have superior flex characteristics on smaller and larger diameter pulleys.

The helically wound tensile cords are specially engineered, twisted, heat and chemically set, polyester material. Testing has proven that the tensile decay properties of **BESTORQ** premier cord are truly World Class.

The belts exceed USA ARPM published rating levels. They are designed to perform at the identical or higher level than all other major USA Manufacturer’s belts of the same type. All 3LX, AX, BX, CX, 3VX, 5VX and 8VX belts are manufactured to meet ARPM standards for length and dimensions. All belts of a given size are manufactured to run interchangeably in a matched set. XPZ, XPA, XPB, and XPC metric belts are manufactured to fit ISO standard dimension multi-groove pulleys.

Dimensions:

	Top Width	Thickness	Angle
3VX	.36"	.33"	38-40
5VX	.60"	.53"	38-40
8VX	1.00"	.89"	38-40
3LX	.35"	.26"	38-40
AX	.49"	.34"	38-40
BX	.62"	.44"	38-40
CX	.87"	.54"	38-40
XPZ	.37"	.32"	38-40
XPA	.49"	.42"	38-40
XPB	.62"	.52"	38-40
XPC	.87"	.70"	38-40

